


## 26030236 - SLB ZKRG 30.75 SS316 Marine ladder L3m

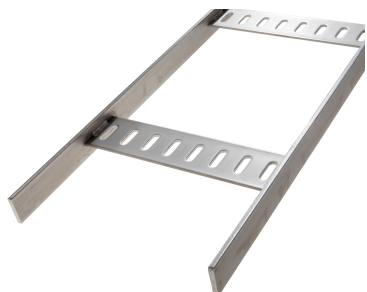

### Product data

|                        |  |
|------------------------|--|
| Product code:          | 26030236                               |
| Brand:                 | Niedax Group                           |
| Series:                | Gouda Marine ladders                   |
| Type:                  | SLB                                    |
| EAN Code:              | 08719972003705                         |
| Technical description: | SLB ZKRG 30.75 SS316 Marine ladder L3m |
| ETIM class:            | EC000854 - Cable ladder                |

### Technical data

|                                 |                              |
|---------------------------------|------------------------------|
| Width:                          | 75                           |
| Height:                         | 30                           |
| RAL-number:                     | -                            |
| Surface protection:             | Other                        |
| Weight:                         | 2.702                        |
| Type of rung:                   | Flat profile                 |
| Side perforation:               | No                           |
| Material quality:               | Stainless steel 316 (1.4401) |
| Length:                         | 3000                         |
| Material:                       | Stainless steel              |
| Usable cross section:           | -                            |
| Type of side joist:             | Flat profile                 |
| Suitable for circuit integrity: | No                           |
| Rung centre spacing:            | 250                          |

|   |           |
|---|-----------|
| Fixation rung:  | Welded    |
| Working length:   | 3000      |
| Vertical cable ladder:  | -         |
| Operating temperature:  | -20 - 120 |
| Possible support spacing:   | - - 3     |
| Safe working load according to IEC 61537 with support spacing 6.0 m:  | -         |
| Safe working load according to IEC 61537 with support spacing 7.0 m:  | -         |
| Safe working load according to IEC 61537 with support spacing 8.0 m:  | -         |
| Safe working load according to IEC 61537 with support spacing 10.0 m: | -         |
| Safe working load according to IEC 61537 with support spacing 9.0 m:  | -         |
| Safe working load according to IEC 61537 with support spacing 11.0 m: | -         |
| Safe working load according to IEC 61537 with support spacing 12.0 m: | -         |
| Safe working load according to IEC 61537 with support spacing 4.0 m:  | -         |
| Safe working load according to IEC 61537 with support spacing 5.0 m:  | -         |