


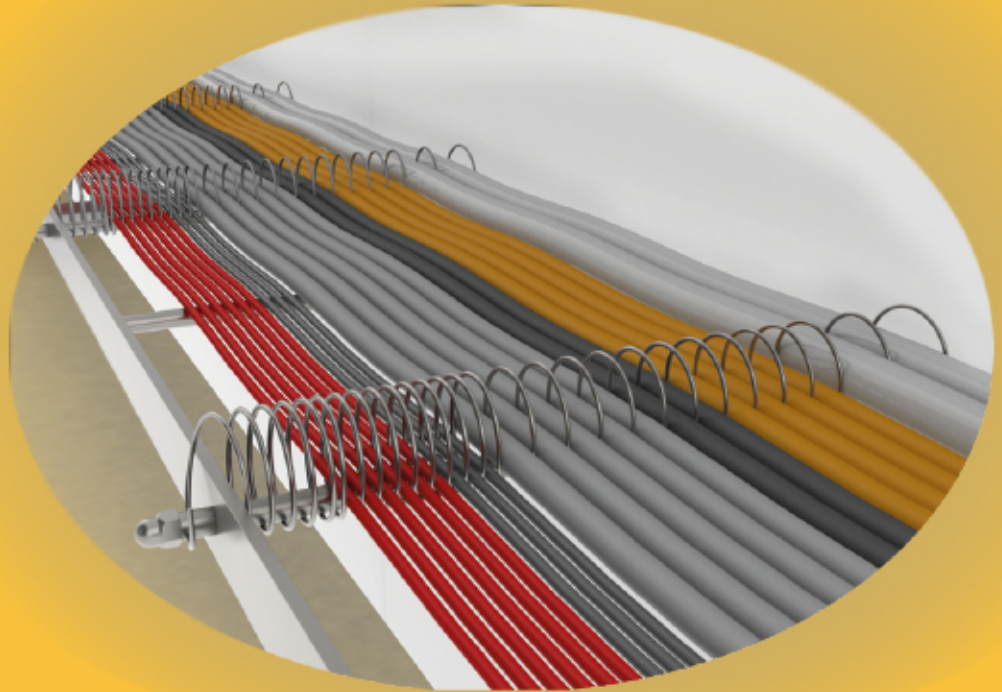


STREAMLINE HD

Streamline
HD
(Hygienic Design)

The hygienic solution for:


- Easy and fast installation of cabling without using cable ties
- Optimal cleanable and minimum contact surfaces
- Flexible (and fixed) cable routing and re-routing of cabling
- According the Practical Guideline Hygienic Cabling Safe Food Factory

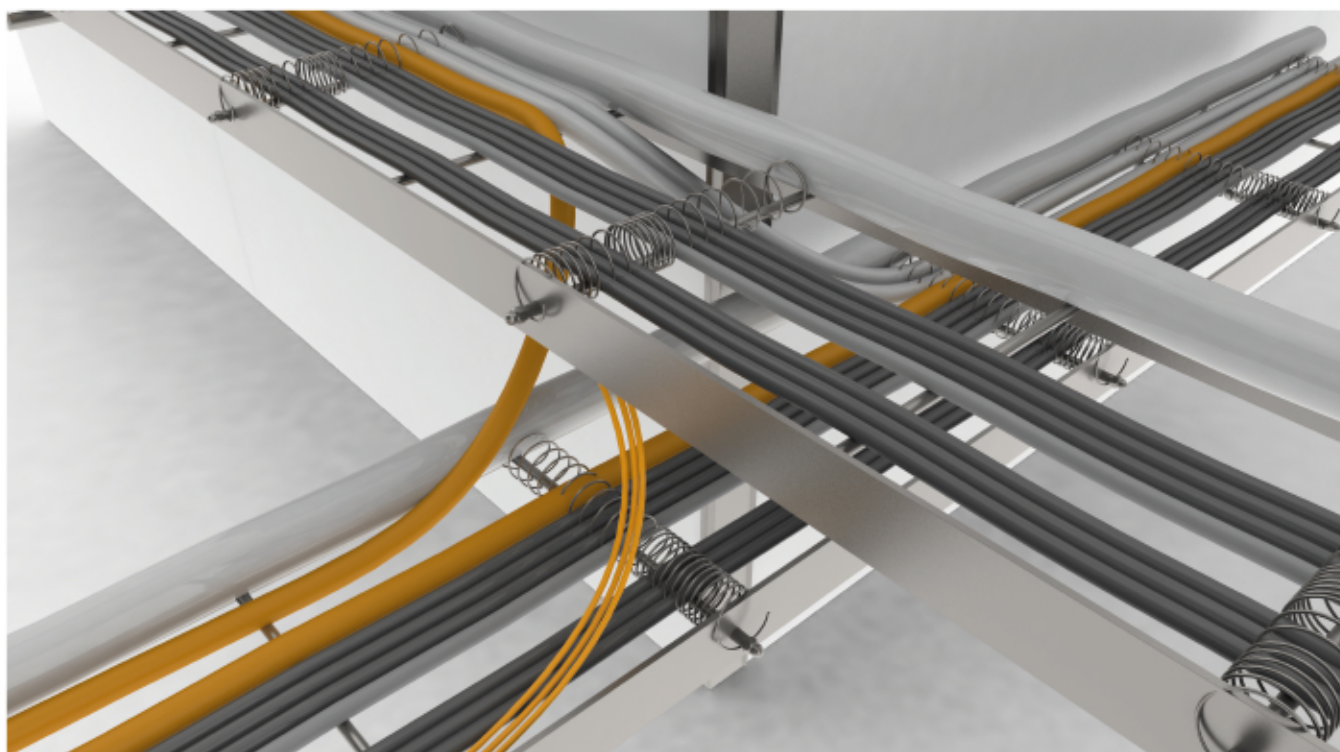

For simple and fast installation of cabling in skid construction, industrial automation, process installations and field cabling
 Due to the distance between the cabling and the minimum contact surface between the springs and the cabling, optimum cleaning can be achieved

Time savings during (re-)installation of cabling or maintenance and cleaning.



Including surface treatment ViwateQ Finishing for extra cleanability and protection against corrosion

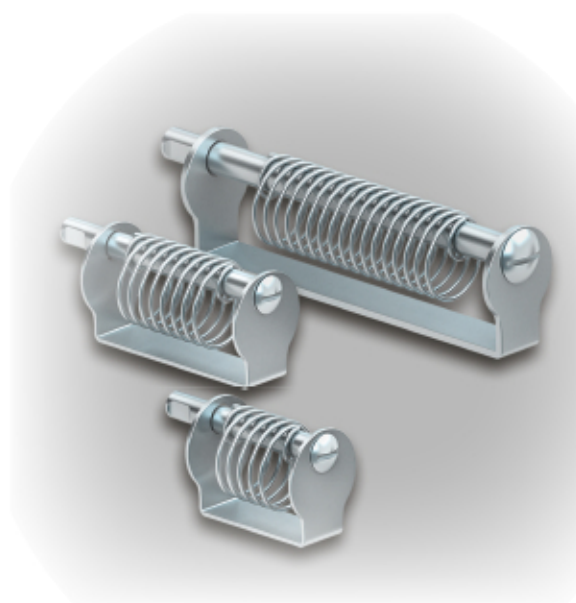


1.

CH 50 E3 = 4 Kabel Ø 4 - 10 mm
 CH 75 E3 = 6 - 7 Kabel Ø 4 - 10 mm
 CH 150 E3 = 12 - 16 Kabel Ø 4 - 10 mm


2.

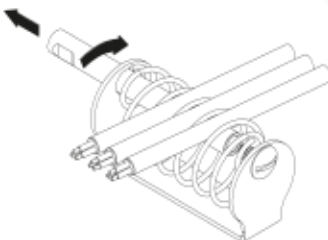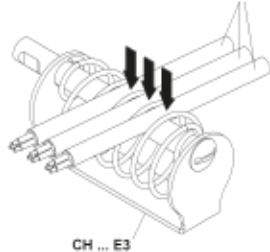

3.

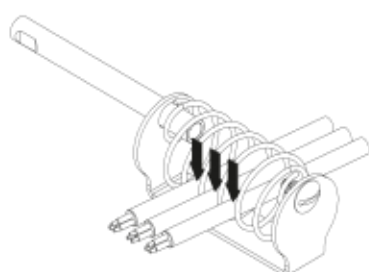


4.

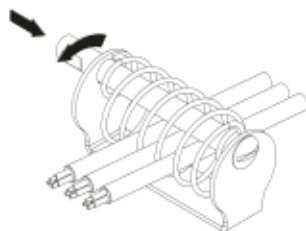

Streamline-HD Ladder

Hygienic Design

Item Number NL	Height H mm	Width B mm	Item description
RVS 45015404	50	150	Streamline HD 60.150 RVS cableladder L3
RVS 45030404	50	300	Streamline HD 60.300 RVS cableladder L3
RVS 45050404	50	500	Streamline HD 60.500 RVS cableladder L3
RVS 45115409	33	150	Innoveer HD ø33-5,5 (4-13) 150
RVS 45130409	33	300	Innoveer HD ø33-5,5 (4-13) 300
RVS 45150409	33	500	Innoveer HD ø33-5,5 (4-13) 500
RVS 45215409	43	150	Innoveer HD ø43-8,0 (6,5-30) 150
RVS 45230409	43	300	Innoveer HD ø43-8,0 (6,5-30) 300
RVS 45250409	43	500	Innoveer HD ø43-8,0 (6,5-30) 500
RVS 45360409	33	100	Innoveer HD ø33-5,5 (4-13)AS 100
RVS 45370409	43	100	Innoveer HD ø43-8,0 (6,5-30)AS 100



Streamline HD Innoveer



Streamline HD AS Innoveer

Cableholder-HD

Hygienic Design


Item number NL	Width B mm	Depth T mm	for Cables Ø mm	max. amount cables	Weight in kg pro 100 Pc.	Kleinste VPE
RVS 45460404	50	20	4 - 10	1 - 4	11	1 St.
RVS 45470404	75	20	4 - 10	6 - 7	14	1 St.
RVS 45480404	150	30	4 - 10	12 - 16	32	1 St.

For simple and fast installation of cabling in skid construction, industrial automation, process installations and field cabling

For simple and fast installation of cabling in skid construction, industrial automation, process installations and field cabling

Recommended mounting distance between two Cable Holders is maximum 400mm.

Several mounting possibilities, for example; direct welding on frames, using a (wall-)bracket or screwing.

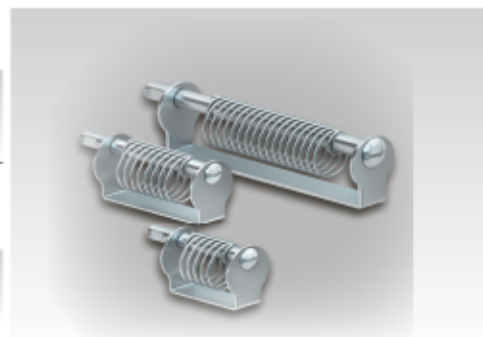

Streamline-HD cableholder on strip

Hygienic Design

Item Number NL	Height H mm	Width B mm	Item description
RVS 45420404	50	50	Cableholder on strip 50 Ø33 RVS L2
RVS 45430404	50	75	Cableholder on strip 75 Ø33 RVS L2
RVS 45440404	50	150	Cableholder on strip 150 Ø33 RVS L1





Gouda Holland B.V.

Member of the NIEDAX Group



+31(0) 182 506 200



www.goudaholland.nl



info@goudaholland.nl